

3MP GMSL2F CAMERA

 GENERAL DESCRIPTION

The camera is equipped with SONY CMOS image sensor IMX623 and Maxim GMSL2. It has an automotive-grade sensor , which comes with an IP67-rated enclosure – is supplied with AA lens that is focused and glued in our factory.

 KEY PARAMETERS

Sensor	SONY 2.95MP IMX623 RGGB
ISP	/
Image Size	1/2.42 inch CMOS
Output Pixels	1920H*1536V
Pixel Size	3.0um*3.0um
Frame Rate	Max 60fps
HDR Support	Yes
LFM	Yes
Output data	MIPI / RAW 12
Serializer	MAXIM MAX96717F
Camera Interface	GMSL2
Power Supply	9~16V POC
Current	<200mA@12VDC
Connector	Amphenol Fakra (Z Code)
Operating temp. range	-40~+85°C
Dimensions	W: 25mm, L:25mm, H:18.6mm
Weight	<50g



 Features

- Output format: Uncompressed RAW format
- S-mount IP67 compliant lens focused and glued at our factory
- Multi-Camera synchronization Support
- Support different focal length lens

 Application

- Automotive
- ADAS + Viewing Fusion
- High Dynamic Range Imaging
- Autonomous Driving
- Robots





HARDWARE SETTING

Serializer	
Model	Max96717F
I2C Address	0x80(8bit address)
Rate	GMSL2 (3G bps)


ISP	
Model	IMX623
I2C Address	0x34 (8bit address)
Frame Sync	Controlled by Max96717F MFP7
Error	Controlled by Max96717F MFP5
Reset	Controlled by Max96717F MFP0

Interface Circuit Diagram





BLOCK DIAGRAM

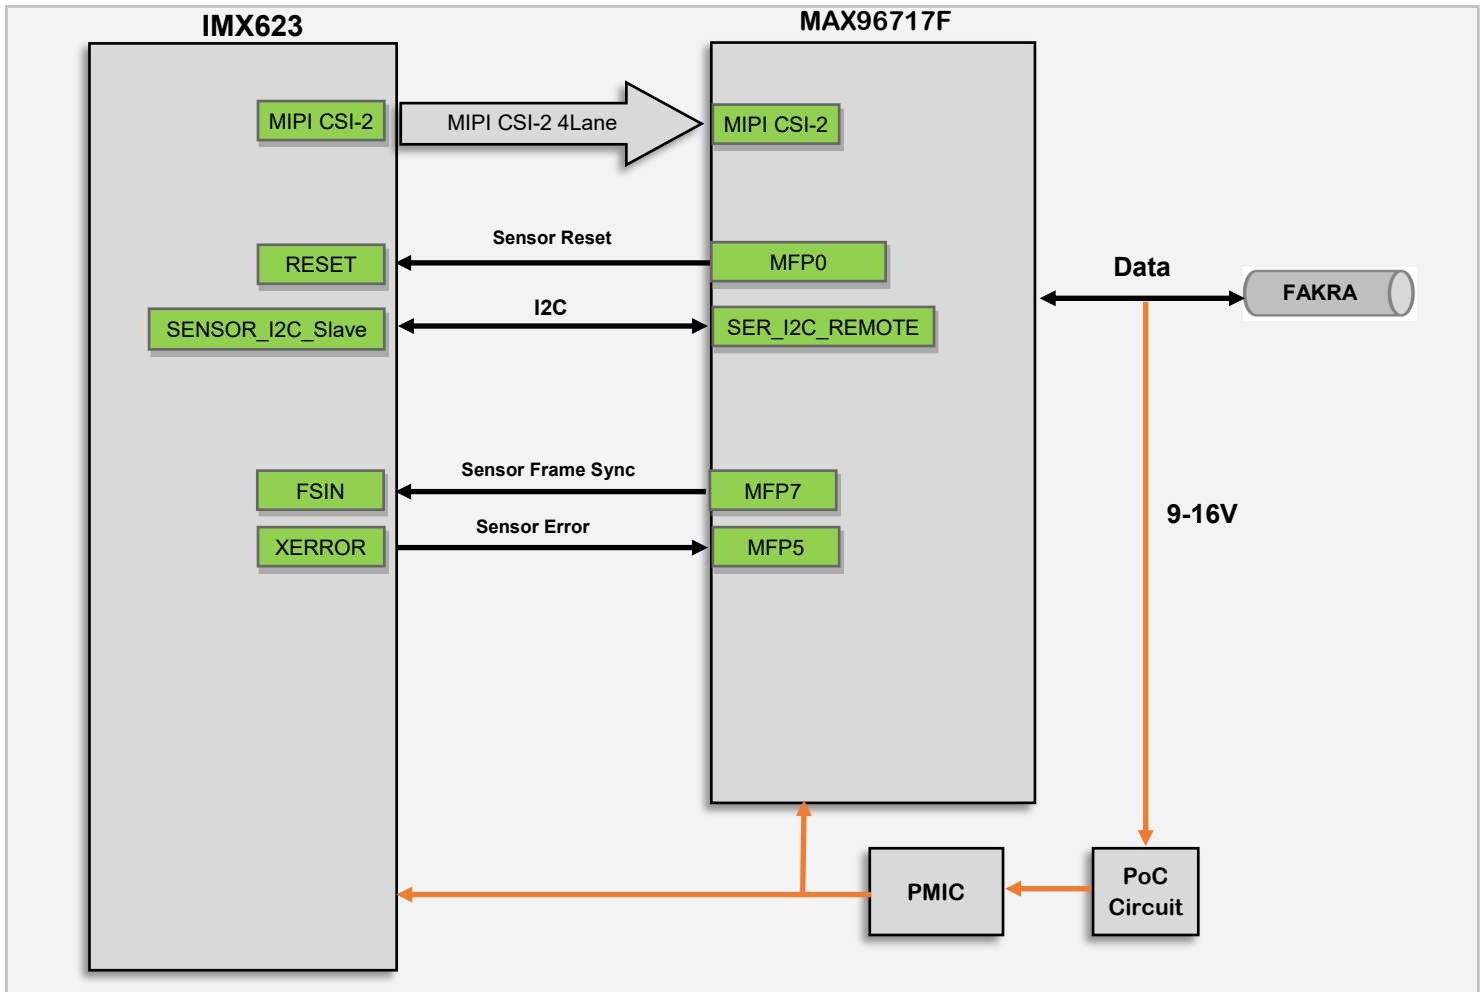

Block Diagram

- ※ The camera module does not have an ISP outputs RAW data. The backend need to configure an image sensor and SerDes;
- ※ For SerDes setting code, please contact Sales@sensing-wolrd.com ;
- ※ The camera support store camera internal parameters, if you need to obtain the internal parameters reading method, please note before placing the order





MODEL AND LENS


Model	HFOV	VFOV	F.No	EFL	Max Optical Distortion	Water-	Lens
SG3S-IMX623C-G2F-H60MA	59.7°	47°	1.8	5.84mm	-21.5%	IP67	AA
SG3S-IMX623C-G2F-H100MA	99°	80°	1.6	3.43mm	-43.9%	IP67	AA
SG3S-IMX623C-G2F-H190XA	196°	154°	2	1.51mm	-155%	IP67	AA




DIMENSIONS




The direction of the head on the drawing is 180 ° opposite to the actual imaging, and the client register configuration software mirror and flip are required for imaging flipping



Front View

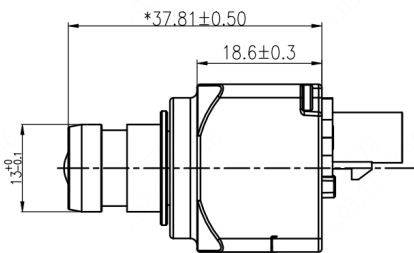

Side View

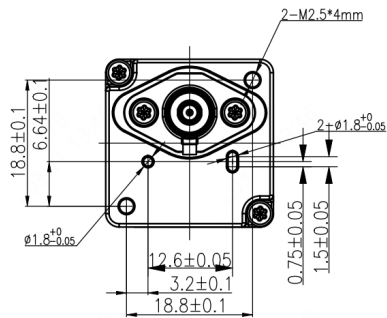

Rear View

Note:

△ There are two different heights of this size to match different lenses. Please refer to 3D digital analog size for details.



This icon indicates the imaging direction is positive.


Dimension



ACCESSORIES

◇ Coaxial Cable

Product Name	Order PN#	Specification
Mini-fakra Coaxial Cable 4-in-1(Rosenberg)	R4JC-JC-ZZZZ-0500L	Mini-fakra, 4 in 1, 0.5m, Female to Female
Mini-fakra Coaxial Cable 4-in-1 (TE)	T4JC-PC-ZZZZ-0500A	Mini-fakra, 4 in 1, 0.5m, Male to Female
Mini-fakra Coaxial Cable 4-in-1(Rosenberg)	R4JC-PC-ZZZZ-0500L	Mini-fakra, 4 in 1, 0.5m, Male to Female
Mini-fakra Coaxial Cable 4-in-1 (TE)	T4JC-JC-ZZZZ-0500A	Mini-fakra, 4 in 1, 0.5m, Female to Female
Camera coaxial Cable	SG-JSZPSZ2000L	2M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZ2000L	2M, Female to Female, IP67
Camera coaxial Cable	SG-JSZPSZ3000L	3M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZ3000L	3M, Female to Female, IP67
Camera coaxial Cable	SG-JSZPSZ5000L	5M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZ5000L	5M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZ7000L	7M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZ8000L	8M, Female to Female, IP67
Camera coaxial Cable	SG-JSZPSZL100L	10M, Male to Female, IP67
Camera coaxial Cable	SG-JSZJSZL100L	10M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZL120L	12M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZL160L	16M, Female to Female, IP67
Camera coaxial Cable	SG-JSZJSZL200L	20M, Female to Female, IP67

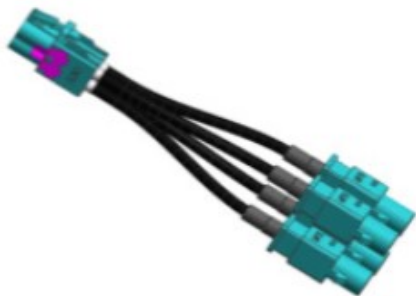



Revision History

Version	Description	Release date
Rev1	First Release	Sep.2023
Rev1	→ Update dimension	Mar.2024

