

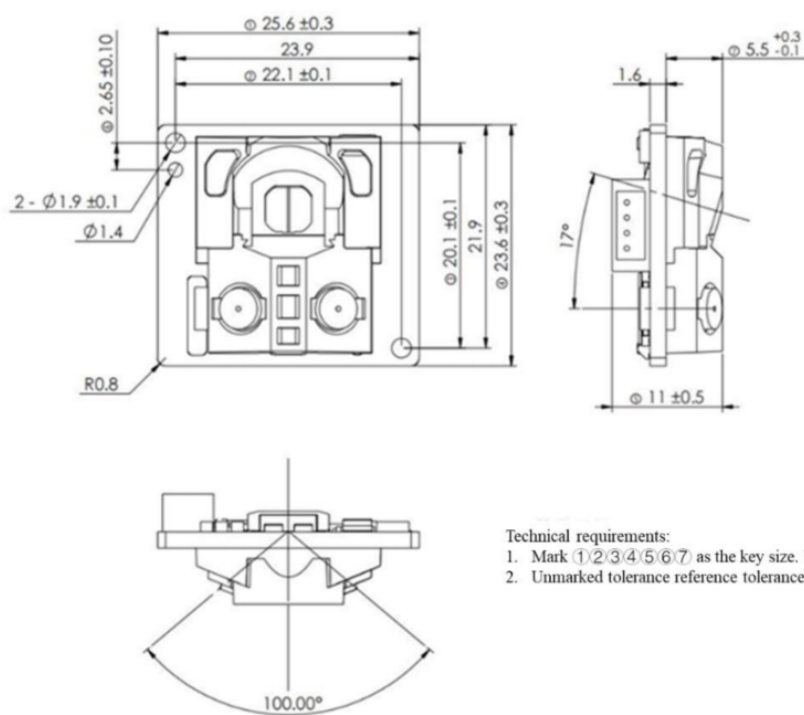


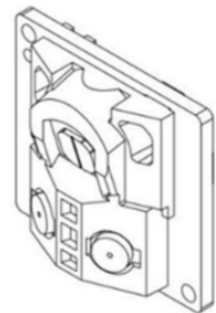

The back of the product is coated with conformal coating which highly covers the surface of components, and the height of the glue shall not be higher than 0.5mm above the surface of the device. Glue avoids screw holes and positioning holes.



Technical requirements:

1. Mark ①/②/③/④/⑤/⑥/⑦ as the key size. Unmarked dimensions refer to 3D.
2. Unmarked tolerance reference tolerance zone.

FIG 1A YDLIDAR GS2-S808G01 INSTALLATION&MECHANICAL SIZE (SCREW SPECIFICATIONS: PB1.7MM)